


Accoat Guide Wire – Double ended Seldinger

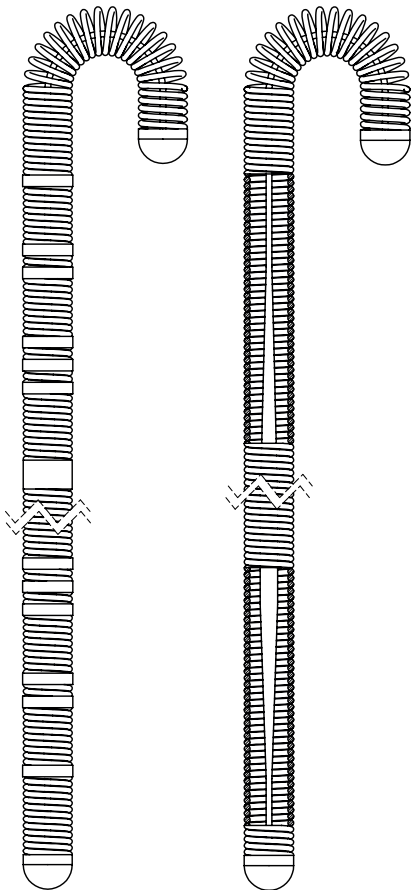

Dimensions

- Ø 0.025" / 0,64 mm
- Ø 0.032" / 0,81 mm
- Ø 0.035" / 0,89 mm
- Ø 0.038" / 0,97 mm

Length

30 – 450 cm

Surface

Stainless steel
PTFE coated

Tip form

J-tip radius: 1,5 – 3 – 6 – 15 mm in
one end and straight tip in the other

Flexible tip length

Standard 5 cm flexible tip

Shaft stiffness

Standard
Stiff

Markers

Uncoated stainless steel
OEM
Length 30-150 cm
1 mm wide surface markers
10 cm step

Customised products on request

Description of item code

(H)-D-S-Jx-(C)-0xx-L
(example: D-S-J3-C-035-150)

H	Stiff Guide Wire
D	Double ended (flexible tip in both ends)
S	Straight tip (one end)
Jx	J-tip radius (the other end) J1.5 mm J3 mm J6 mm J15 mm
C	PTFE coated
Without C	stainless steel
M	Surface marker
0xx:	Diameter of the guide wire 025: 0.025" (0,64 mm) 032: 0.032" (0,81 mm) 035: 0.035" (0,89 mm) 038: 0.038" (0,97 mm)
L:	Length of the guide wire (from 30 – 450 cm)